





NDP-15BP
[Feet] [Meter]

1Bar = 0,1MPa

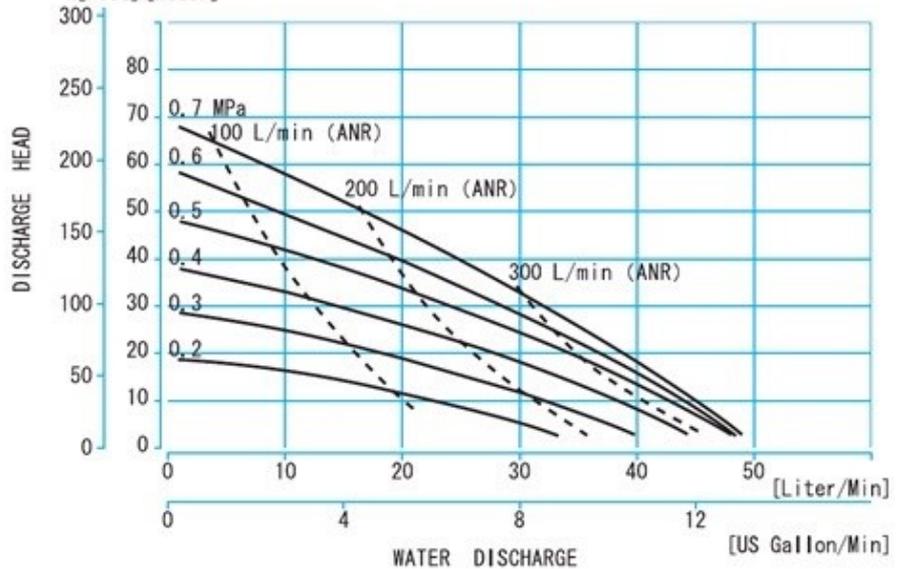

TECHNICAL DATA			Pump type NDP-15BP-Z (Ball valve execution)			
Air supply pressure	0,2-0,7	MPa	Max. viscosity (neg. suc.)	3.000	Cp	
Max. discharge volume/cycle	110	Cc	Max. viscosity (flooded suction.)	5.000	Cp	
Max. discharge volume	45	L/min	Max. air consumption	350	NL/min	
Max. discharge pressure	0,7	MPa	Max. noise level	81	dB(a)	
Max. size of solids	1	mm	Operating temp. ambient	70	°C	
Max. suction lift dry	PTFE fitted	1,0	Max operating temp. fluid			
Max. suction lift wet	PTFE fitted	3,5	Diaphragm compound	NBR /CR / TPO	70	°C
Max. fluid inlet pressure	PTFE fitted	0,03	Diaphragm compound	EPDM/ PTFE	70	°C
Max. suction lift dry	Rubber fitted	2,0	Diaphragm compound	TPEE /FPM	70	°C
Max. suction lift wet	Rubber fitted	4,5				
Max. fluid inlet pressure	Rubber fitted	0,1	Net Weight	Type P	PPG	3,5 Kg
Caution! Data based on water (1 Cp)						
Wetted parts: Pump chambers + manifolds			PPG - Polypropylene reinforced with glass fiber			
Motor			PPS - Ryton			

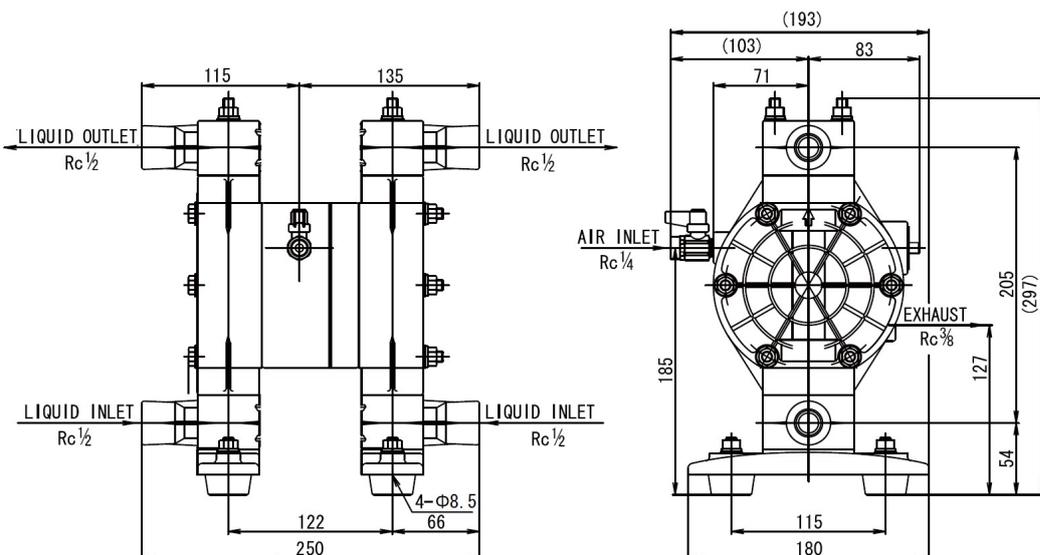

Max pressure vs temperature

