



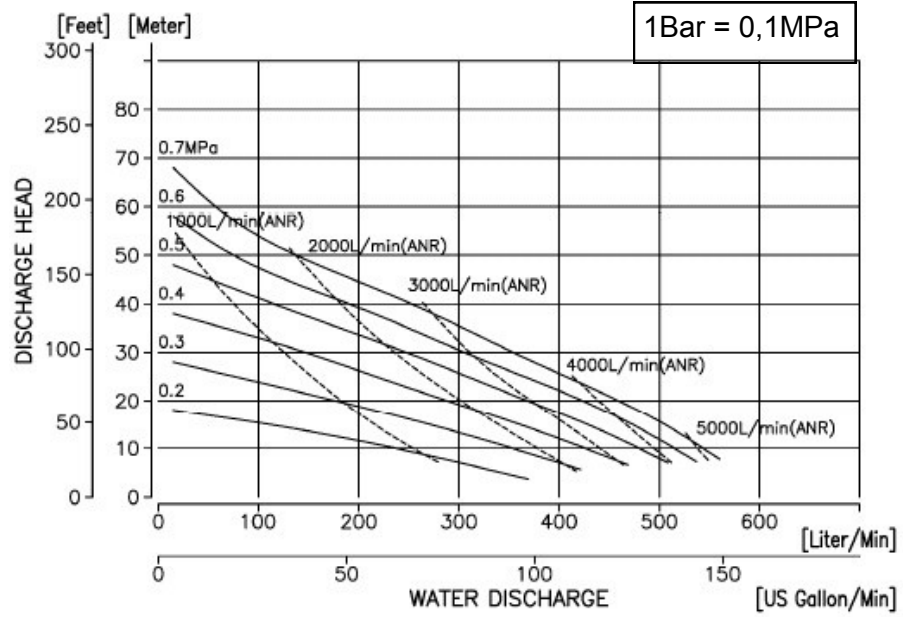

DATA SHEET

NDP-P50BPT

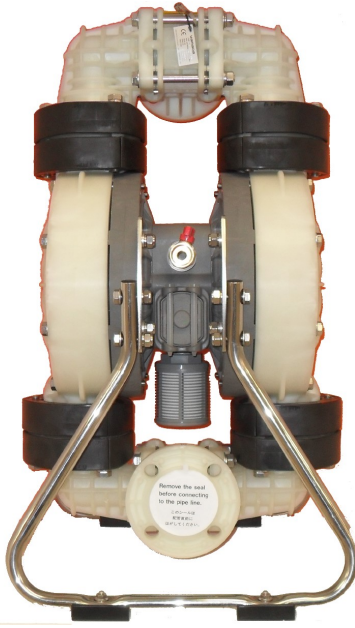

TECHNICAL DATA				Pump type NDP-P50BPT				
Air supply pressure	0,2-0,7	MPa	Max. viscosity (neg. suc.)	10.000	Cp			
Max. discharge volume/cycle	2300	Cc	Max. viscosity (flooded suction.)	30.000	Cp			
Max. discharge volume	560	L/min	Max. air consumption	5000	NL/min			
Max. discharge pressure	0,7	MPa	Max. noise level	82	dB(a)			
Max. size of solids	8	mm	Operating temp. ambient	70	°C			
Max. suction lift dry	PTFE fitted	4,5	Max operating temp. fluid					
Max. suction lift wet	PTFE fitted	8,0	Diaphragm compound					
Max. fluid inlet pressure	PTFE fitted	0,03	Diaphragm compound	PTFE	82	°C		
Max. suction lift dry	Rubber fitted		Diaphragm compound					
Max. suction lift wet	Rubber fitted							
Max. fluid inlet pressure	Rubber fitted		Net Weight	Type P	PPG	37,0	Kg	
Caution! Data based on water (1 Cp)								
Wetted parts: Pump chambers + manifolds			PPG - Polypropylene reinforced with glass fiber					
Motor			PPG - Polypropylene reinforced with glass fiber					

